




# Disassembling Nokia 6590i Keypad, Speaker, and Screen Assembly

Remove the keypad, speaker, and screen assembly.

Written By: Colby Leslie

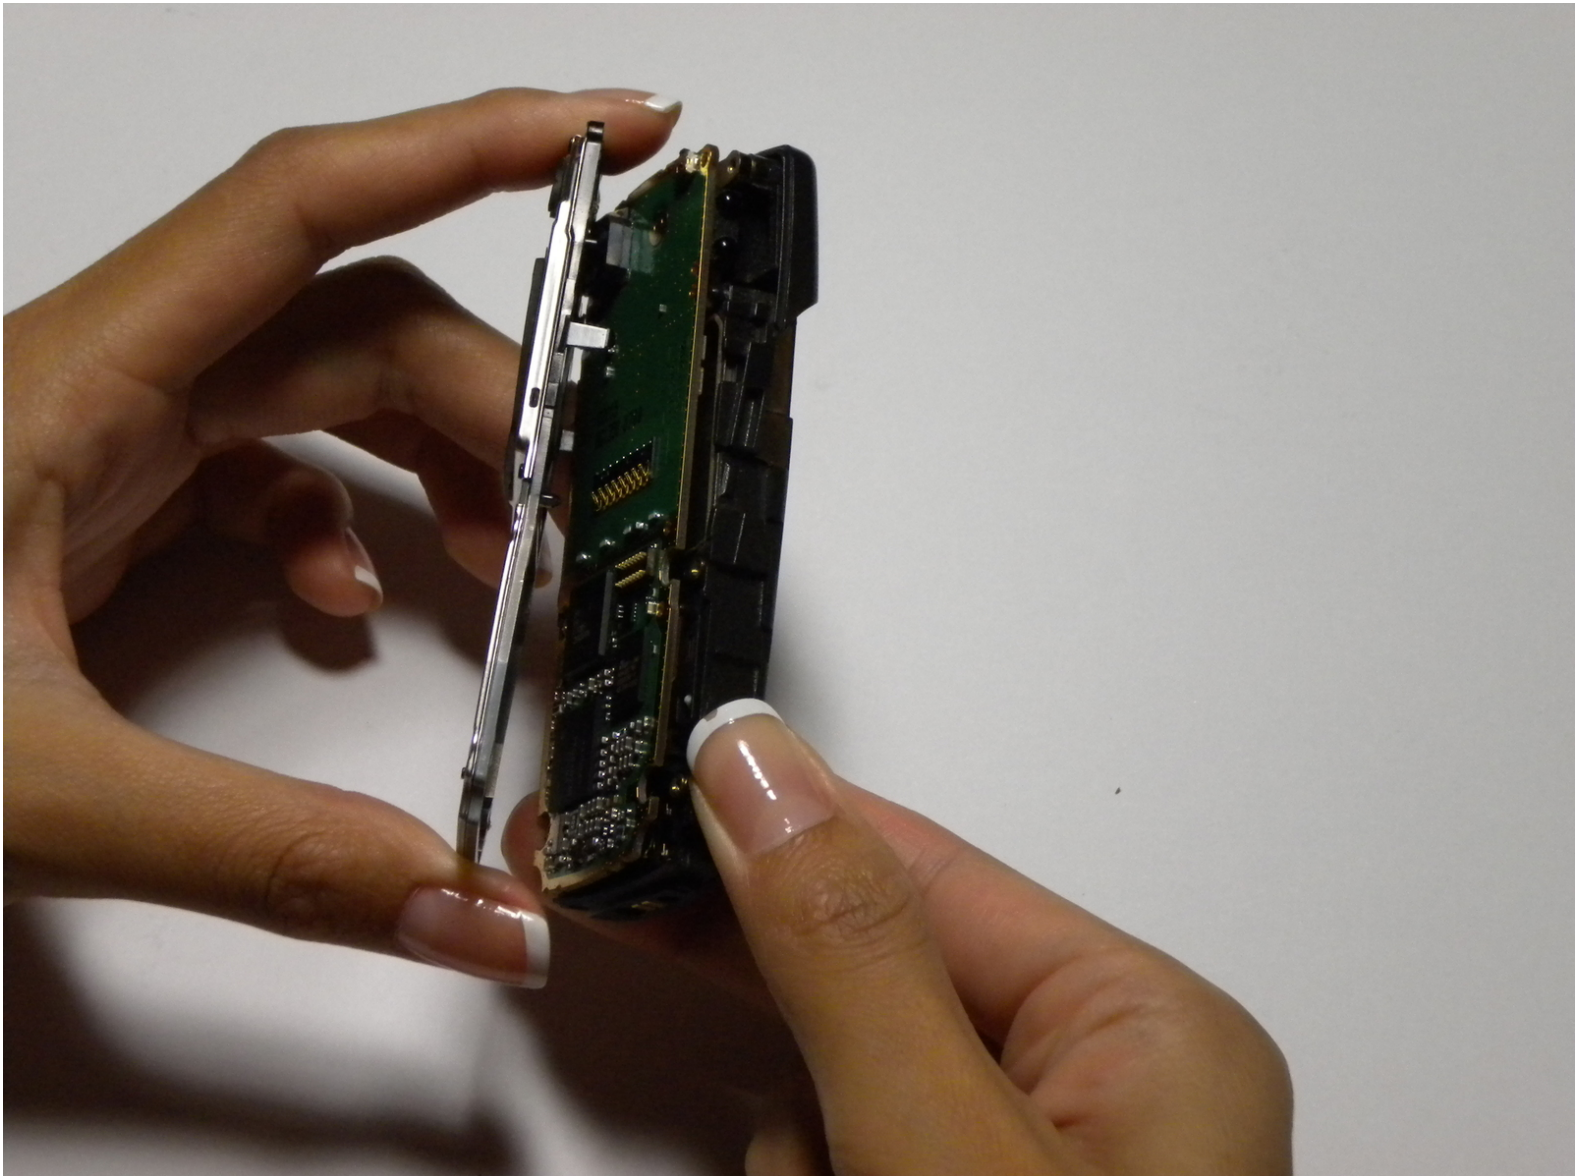

## INTRODUCTION

This guide will show you how to remove the assembly that houses the phone's keypad, speaker and screen.

---



### TOOLS:


- [Spudger](#) (1)
  - [T6 Torx Screwdriver](#) (1)
-

## Step 1 — Battery



- Press the button to remove the back cover.
- Pull the cover downward and lift it off while still pressing the button.

## Step 2

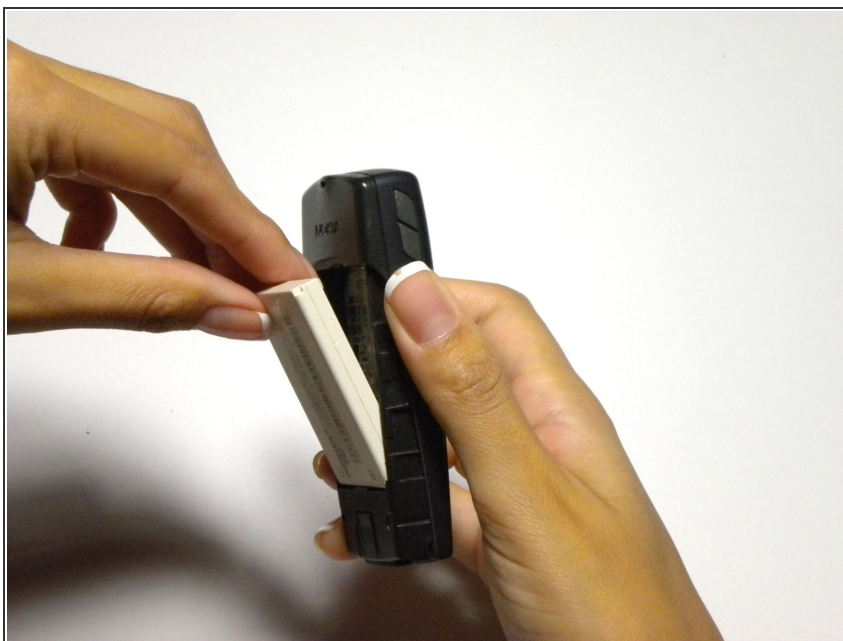

- Lift the battery out of the phone by pushing down from the top and pulling out



### Step 3 — Keypad, Speaker, and Screen Assembly



- Grip the front cover from the bottom.

### Step 4



- Lift the front cover off.

## Step 5




- Locate 6 screws on front of assembly and unscrew them using a T6 torx screwdriver.

## Step 6



- Insert spudger along edge of assembly and gently lift assembly away from case

## Step 7

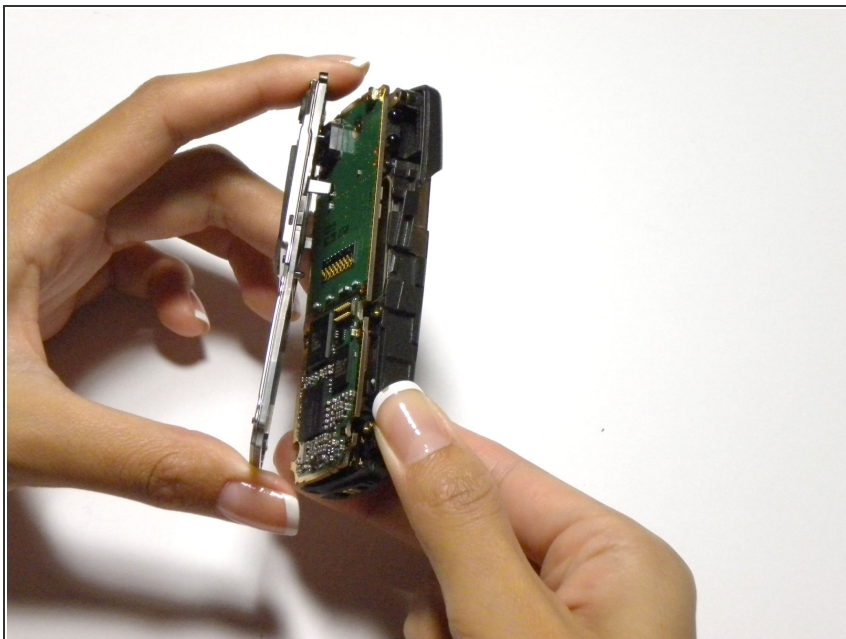

- Remove assembly from phone

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-20 09:29:02 AM.